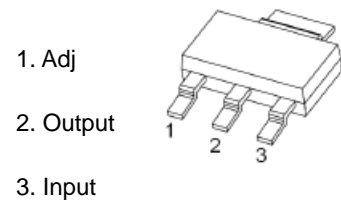


**SOT-223 Plastic-Encapsulate Voltage Regulator****LM317** Three-terminal positive voltage regulator**DESCRIPTION**

This monolithic integrated circuit is an adjustable 3-terminal positive voltage regulator designed to supply more than 1.5A of load current with an output voltage adjustable over a 1.2 to 37V. It employs internal current limiting, thermal shut-down and safe area compensation.

**FEATURE**

- Internal thermal overload protection
- Internal short circuit current limiting
- Output transistor safe operating area compensation

**MARKING****SOT-223****Absolute Maximum Ratings**

Symbol	Parameter	Value	Unit
$V_I-V_O$	Input-Output Voltage Differential	40	V
$T_{LEAD}$	Lead Temperature	230	°C
$P_D$	Power Dissipation	Internally limited	W
$T_J$	Operating Junction Temperature Range	-40~+125	°C
$T_{stg}$	Storage Temperature Range	-55~+150	
$\Delta V_O / \Delta T$	Temperature Coefficient of Output Voltage	±0.02	%/°C

**Thermal Metric**

Thermal Metric	Symbol	LM317	Unit
		SOT-223	
Junction-to-ambient thermal resistance	$R_{\theta JA}$	100.0	°C/W
Junction-to-board thermal resistance	$R_{\theta JC}$	5.0	°C/W
Continuous power dissipation for reference	$P_{D Ref}$	1.00	W

# ELECTRICAL CHARACTERISTICS


( $V_I - V_O = 5V$ ,  $I_O = 0.5A$ ,  $0^\circ C \leq T_J \leq +125^\circ C$ ,  $I_{MAX} = 1.5A$ ,  $P_{MAX} = 20W$ , unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Line Regulation(note1)	$R_{line}$	$T_A = 25^\circ C$ $3V \leq V_I - V_O \leq 40V$		0.01	0.04	% / V
		$3V \leq V_I - V_O \leq 40V$		0.02	0.07	
Load Regulation(note1)	$R_{load}$	$T_A = 25^\circ C$ , $10mA \leq I_O \leq I_{MAX}$ $V_O < 5V$ $V_O \geq 5V$		18 0.4	25 0.5	mV% / $V_O$
		$10mA \leq I_O \leq I_{MAX}$ $V_O < 5V$ $V_O \geq 5V$		40 0.8	70 1.5	
Adjustable Pin Current	$I_{ADJ}$	-		46	100	$\mu A$
Adjustable Pin Current Change	$\Delta I_{ADJ}$	$3V \leq V_I - V_O \leq 40V$ $10mA \leq I_O \leq I_{MAX}$ , $P_D \leq P_{MAX}$		2.0	5	
Reference Voltage	$V_{REF}$	$3V \leq V_{IN} - V_O \leq 40V$ $10mA \leq I_O \leq I_{MAX}$ , $P_D \leq P_{MAX}$	1.20	1.25	1.30	V
Temperature Stability	$ST_T$	-		0.7		% / $V_O$
Minimum Load Current to Maintain Regulation	$I_{L(Min)}$	$V_I - V_O = 40V$		3.5	12	mA
Maximum Output Current	$I_{O(Max)}$	$V_I - V_O \leq 15V$ , $P_D \leq P_{MAX}$ $V_I - V_O \leq 40V$ , $P_D \leq P_{MAX}$ $T_A = 25^\circ C$	1.0	2.2 0.3		A
RMS Noise, % of $V_{OUT}$	$e_N$	$T_A = 25^\circ C$ , $10Hz \leq f \leq 10kHz$		0.003	0.01	% / $V_O$
Ripple Rejection	RR	$V_O = 10V$ , $f = 120Hz$ without $C_{ADJ}$ $C_{ADJ} = 10\mu F$ (note2)	66	60 75		dB
Long-Term Stability, $T_J = T_{HIGH}$	ST	$T_A = 25^\circ C$ for end point measurements, 1000HR		0.3	1	%


## Notes:

1. Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used. ( $P_{MAX} = 20W$ )
2.  $C_{ADJ}$ . when used, is connected between the adjustment pin and ground.

## Internal Block Diagram

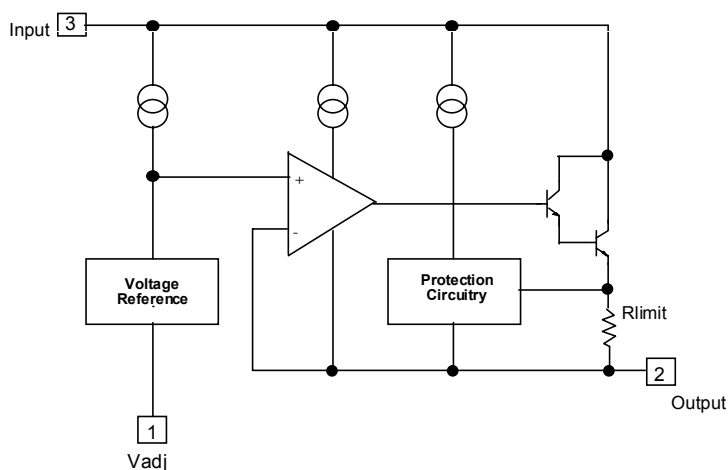

## Typical Application


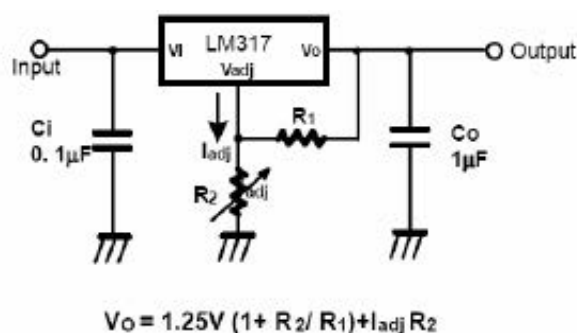


$C_i$  is required when regulator is located an appreciable distance from power supply filter.

$C_o$  is not needed for stability, however, it does improve transient response.


Since  $I_{ADJ}$  is controlled to less than 100 $\mu A$ , the error associated with this term is negligible in most applications.

# SOT-223 Package Outline Dimensions

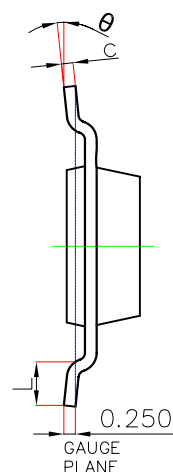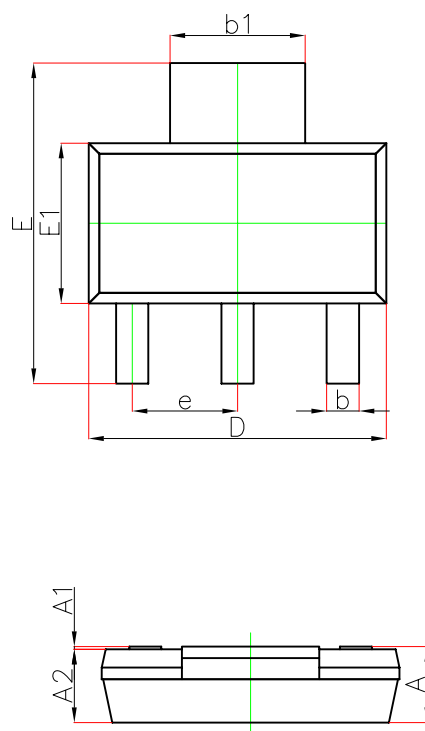


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	—	1.800	—	0.071
A1	0.020	0.100	0.001	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.840	0.026	0.033
b1	2.900	3.100	0.114	0.122
c	0.230	0.350	0.009	0.014
D	6.300	6.700	0.248	0.264
E	6.700	7.300	0.264	0.287
E1	3.300	3.700	0.130	0.146
e	2.300(BSC)		0.091(BSC)	
L	0.750	—	0.030	—
$\theta$	0°	10°	0°	10°

# SOT-223 Suggested Pad Layout

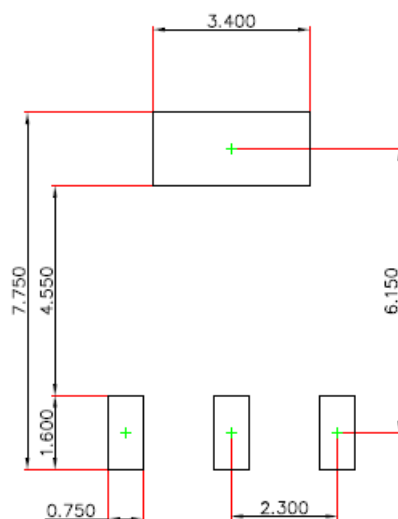

- Note:**
- 1.Controlling dimension:in millimeters.
  - 2.General tolerance:±0.050mm.
  - 3.The pad layout is for reference purposes only.

## SOT-223 Embossed Carrier Tape

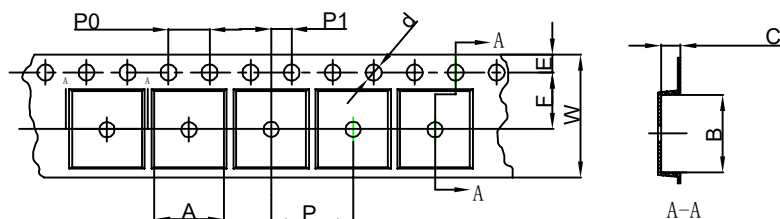


### Packaging Description:



SOT-223 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 2,500 units per 13" or 33.0cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-223	6.765	7.335	1.88	Ø1.50	1.75	5.50	4.00	8.00	2.00	12.00

## SOT-223 Tape Leader and Trailer

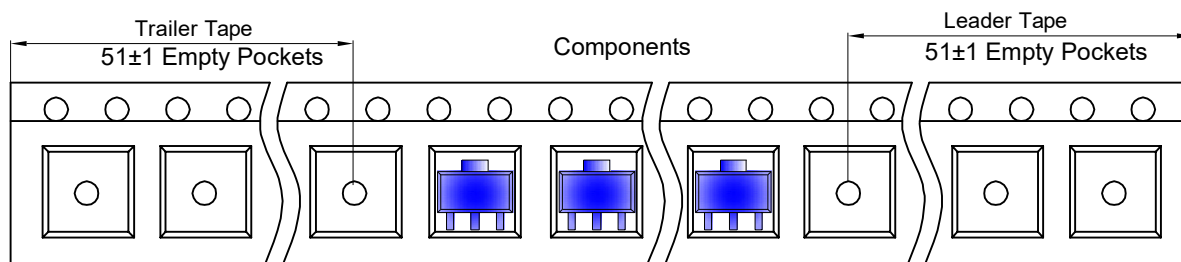

## SOT-223 Reel

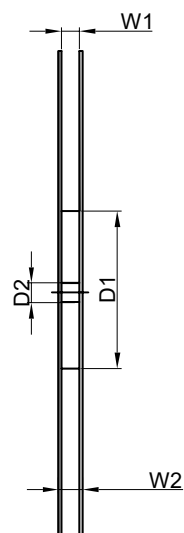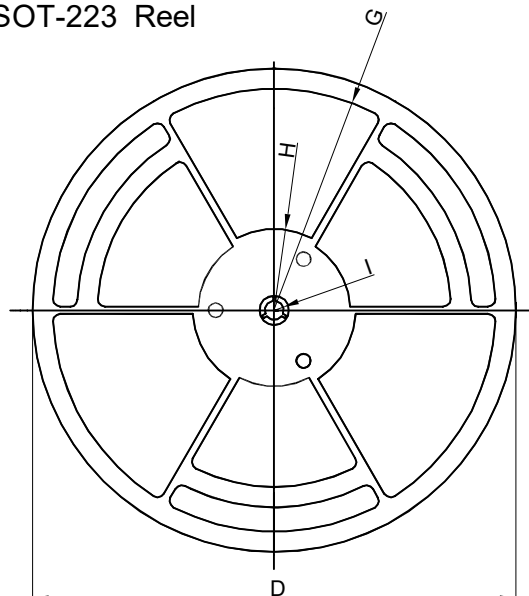

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
13"Dia	Ø330.00	100.00	13.00	R151.00	R56.00	R6.50	12.40	17.60

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
2,500 pcs	13 inch	2,500 pcs	336×336×48	20,000 pcs	445×355×365	

# DISCLAIMER

## IMPORTANT NOTICE, PLEASE READ CAREFULLY

The information in this data sheet is intended to describe the operation and characteristics of our products. JSCJ has the right to make any modification, enhancement, improvement, correction or other changes to any content in this data sheet, including but not limited to specification parameters, circuit design and application information, without prior notice.

Any person who purchases or uses JSCJ products for design shall: 1. Select products suitable for circuit application and design; 2. Design, verify and test the rationality of circuit design; 3. Procedures to ensure that the design complies with relevant laws and regulations and the requirements of such laws and regulations. JSCJ makes no warranty or representation as to the accuracy or completeness of the information contained in this data sheet and assumes no responsibility for the application or use of any of the products described in this data sheet.

Without the written consent of JSCJ, this product shall not be used in occasions requiring high quality or high reliability, including but not limited to the following occasions: medical equipment, automotive electronics, military facilities and aerospace. JSCJ shall not be responsible for casualties or property losses caused by abnormal use or application of this product.

Official Website: [www.jscj-elec.com](http://www.jscj-elec.com)

Copyright © JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD.