

为您的产品保驾护航

PRODUCT DATASHEET

Surface Mount Fuse

**JFC2410FS FAST ACTING FUSE**




### Descriptions

JFC2410FS series are fast acting square Surface Mount fuses are ceramic tube/end cap constructions, RoHS compliant, Halogen Free and lead(Pb) exempts of the requirements of RoHS Directive(2002/95/EC), with U.S. (UL/CSA) safety agency approvals. Provide board level primary and secondary circuit protection in a wide variety of applications. With excellent inrush current withstanding capability, excellent reliability for thermal and mechanic shock, also have a high reliability and stable solder ability, end caps are available in gold/silver/nickel plated.

### Applications

- LED lighting
- Notebook PC
- Battery devices
- LCD/PDP devices
- LCD backlight in verter
- Portable Device
- Power supply
- Networking devices
- PC server
- Cooling fan system
- Storage system
- Telecom system
- Wireless base station
- White goods
- Game console
- Digital camera
- Office equipment
- Digital camera
- Automotive devices
- Medical equipment
- Industrial equipment

### Agency Approvals

AGENCY	AGENCY FILE NUMBER
	E486200

### Features

- Fast acting
- RoHS compliant
- Conflict free metals
- Small size (6.1mm\*2.5mm)
- Wide range of current rating available
- Wide operating temperature range
- Low temperature de-rating
- Tape and Reel for automatic placement

### Electrical Characteristics

- Pre-Arcing Time / Current Characteristics:




% of Ampere Rating(In)	Opening Time
100%*In	4 hours Min
200%*In	5 sec Max

**Performance Specification**

Part Number	Rated Current (A)	Max Voltage Rating(V)	Interrupting Rating	Nominal Cold Resistance (mΩ)	Nominal Melting I <sup>2</sup> t (A <sup>2</sup> sec)
JFC2410-0062FS	0.062	250V	50A@250V	5650	0.00034
JFC2410-0100FS	0.10			3140	0.040
JFC2410-0250FS	0.25			860	0.145
JFC2410-0375FS	0.375			580	0.215
JFC2410-0500FS	0.50			320	0.275
JFC2410-0750FS	0.75			175	1.240
JFC2410-1100FS	1.00			148	3.500
JFC2410-1150FS	1.50			85	6.305
JFC2410-1200FS	2.00			44	8.950
JFC2410-1250FS	2.50			43	16.025
JFC2410-1300FS	3.00			33	21.560
JFC2410-1315FS	3.15			29	22.750
JFC2410-1350FS	3.50			27	27.050
JFC2410-1400FS	4.00			25	31.808
JFC2410-1500FS	5.00			19	40.250
JFC2410-1600FS	6.00			18	67.245
JFC2410-1630FS	6.30			17	107.55
JFC2410-1700FS	7.00	15	132.78		
JFC2410-1800FS	8.00	7.0	235.18		
JFC2410-2100FS	10.0	7.0	270.50		
JFC2410-2120FS	12.0	125V	100A@125V	7.0	331.52
JFC2410-2150FS	15.0			6.0	375.66
JFC2410-2200FS	20.0	72V	500A@72V	2.3	410.00
JFC2410-2250FS	25.0			1.7	550.00
JFC2410-2300FS	30.0			1.2	900.00

## Dimensions and Structure

- Outline Drawing and dimensions (unit : mm)

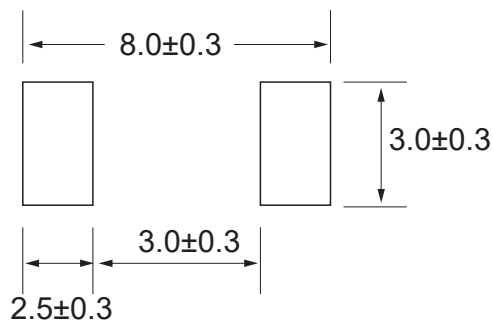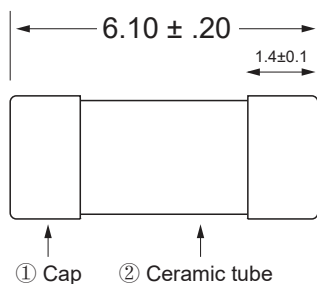

Recommended pad layout

- Material Details:

NO.	Component	Material
①	Cap	Au Plated Brass Cap
②	Body	Non-Transparent Square Ceramic Tube
③	Fuse element	Cu-Ag Alloy wire


## Product Characteristics

No.	Item	Contain	Reference standard
1	Insulation Resistance	10,000 ohms minimum	MIL-STD-202G, Method 302 Test Condition A
2	Solderability	T=240°C±5°C, t=5+0/-0.5s, Cover ≥ 95%	MIL-STD-202G, Method 208H
3	Resistance to Soldering Heat	10 sec at 260°C	MIL-STD-202G, Method 210F Test Condition B
4	Thermal Shock	5 cycles, -65°C to +125°C, 15minutes @each extreme	MIL-STD-202G, Method 107G Test Condition B
5	Mechanical Shock	100G's peak for 6 milliseconds, 3 cycles	MIL-STD-202G, Method 213B Test 1
6	Vibration	0.03" amplitude, 10-55 Hz in 1 min. 2hrs each XYZ=6hrs	MIL-STD-202G, Method 201A
7	Moisture Resistance	10 cycles	MIL-STD-202G, Method 106G
8	Salt Spray	5% salt solution, 48hrs	MIL-STD-202G, Method 101E Test Condition B
9	Operating Temperature	-55°C to +125°C	IEC60068-2-1/2


## Environmental Characteristic

- Company operating temperature of the environment more than  $25 \pm 5^\circ\text{C}$ , in the selection of fuse specifications, it needs to consider the impact of the operating environment of the temperature fuse. Photo: temperature derating curve.


### Temperature Derating Curve

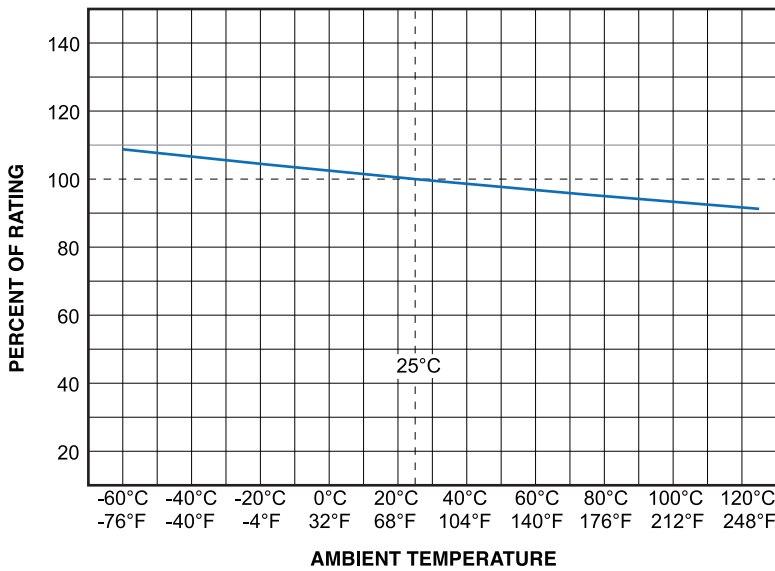

### Average Time-Current Curve

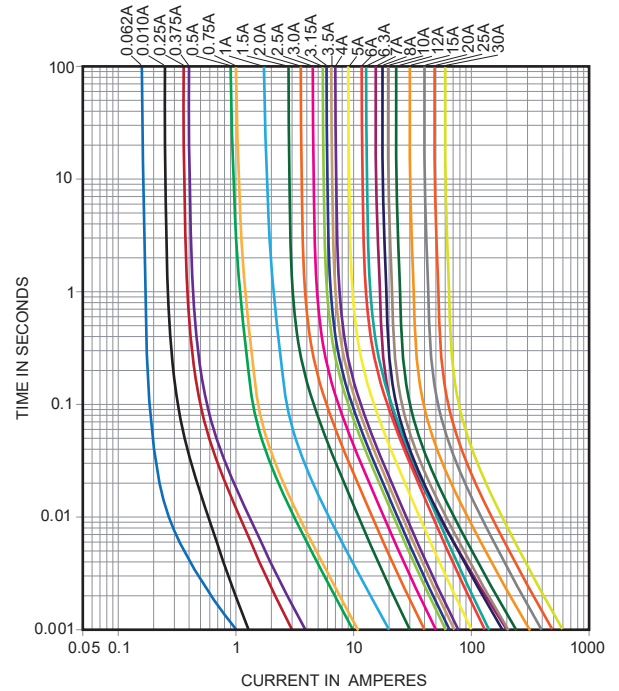

## Recommended Soldering Parameters

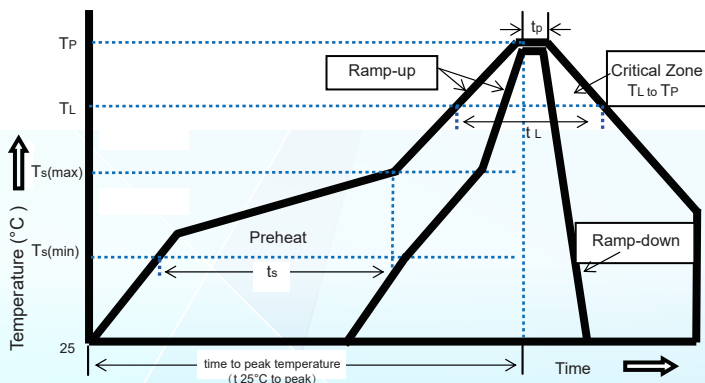

	Reflow Condition	Pb-Free assembly
Preheat	Average ramp-up rate ( $T_s(\text{max})$ to $T_p$ )	$5^\circ\text{C}/\text{second max.}$
	Temperature Min ( $T_s(\text{min})$ )	$150^\circ\text{C}$
Reflow	Temperature Max ( $T_s(\text{max})$ )	$200^\circ\text{C}$
	Time (Min to Max) ( $t_s$ )	60~120 seconds
Peak Temperature ( $T_p$ )	Temperature ( $T_L$ )	$220^\circ\text{C}$
	Time Max ( $t_L$ )	60 seconds
Ramp-down Rate		$5^\circ\text{C}/\text{second max}$
Time $25^\circ\text{C}$ to peak Temperature ( $T_p$ )		8 minutes max


**Packing**

No.	Quantity &Packaging Code
JFC2410FS	1000 fuses/reel
JFC2410-0100FS	1500 fuses/reel

(12mm tape-and-reel on a 7 inch (178mm) reel per EIA Standard 481)

**Part Numbering**

**JF C 2410 - xxxx F S**

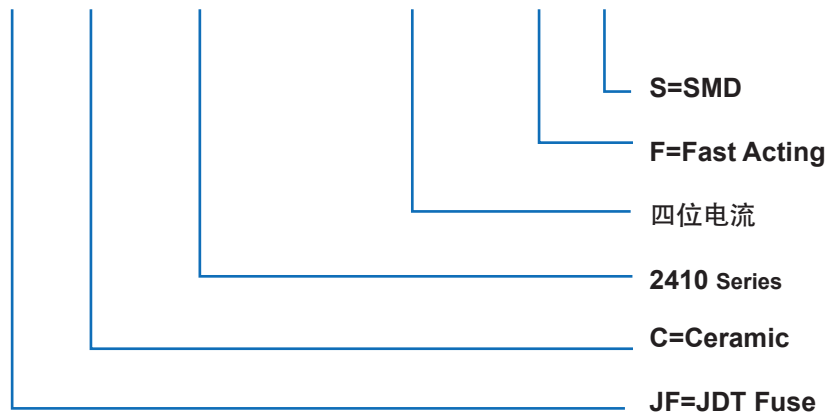
**OTHERS**

- If in use beyond the requirements of the specifications, must pass through the mutual confirmation !
- If the specification is not appropriate, must through consultation between the two sides and by the company to modify.
- It could be in conformance with another file which made by our company.